

Quantium 310 CNG

Alternative Fuels



A faster, safer fuelling experience combined with high quality componentry is at the heart of Tokheim's Quantum 310 CNG dispenser. A truly modular dispenser, the Quantum 310 CNG allows for a variety of nozzle options and alignments for either trucks or light vehicles. Tokheim's CNG dispensers are designed to last longer even in the toughest of conditions.

“Our authorised local service representatives and distributors are geared towards helping you select a solution that will be the right one for your forecourt business.”

Quantium 310 CNG at a glance

Hose management

Our Quantum 310 CNG dispenser is an 'H-type' design with a simple, but effective hanging hose system for ease of use.

Hydraulics

Optimised pneumatic CNG architecture with up to 80kg/min flow-rate to ensure a fast and reliable service for your customers.



Calculator

Tokheim's LED backlit LCD display provides a crisp display of digital units. This innovative display provides enhanced functionality under any lighting conditions.

Components

The specially selected CNG components work very effectively, in the toughest conditions, with a lower service intervention rate than other CNG dispensers in the marketplace.

Lifting slots

Quantium dispensers are equipped with lifting slots as standard. This solution provides the industry's highest level of safety and security during dispenser's onsite installation and removal.

Quantium 310 CNG Features


This robust dispenser is only delivered to your site after rigorous testing at Tokheim's world-renowned Quality Manufacturing Centre. The Quantum 310 CNG dispenser is supplied with powder painted aluminium panels for long lasting protection against the outdoor environment.

Features & Benefits

- Select from island oriented (dispenser for use from both lanes) 1 or 2 hoses, to allow for easier fuelling and more effective throughput.
- The dispenser's performance is optimised through a range of exceptional components: A high-end quality mass flow-meter, a wide range of CNG nozzles and Tokheim's renowned calculator platform.
- After sales support from Tokheim authorised service representatives and distributors.


Optional Features

- Specialist CNG PCS (Pressure Compensation System) technology to optimise the tank pressure and help maximise the storage capacity.
- DiaLOG fleet management system for commercial fleet sector.

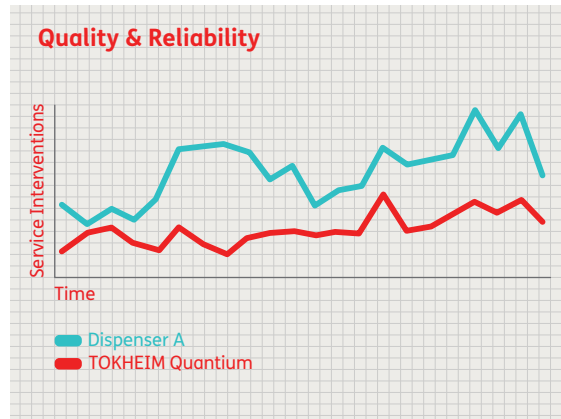

Less Service, less hassle

Tokheim's Quantum dispensers have been independently verified to have less service interventions than other industry installed and supplied pumps. Greater uptime means improved throughput and your customers can rely on your service station for a faster and more pleasant refuelling experience.

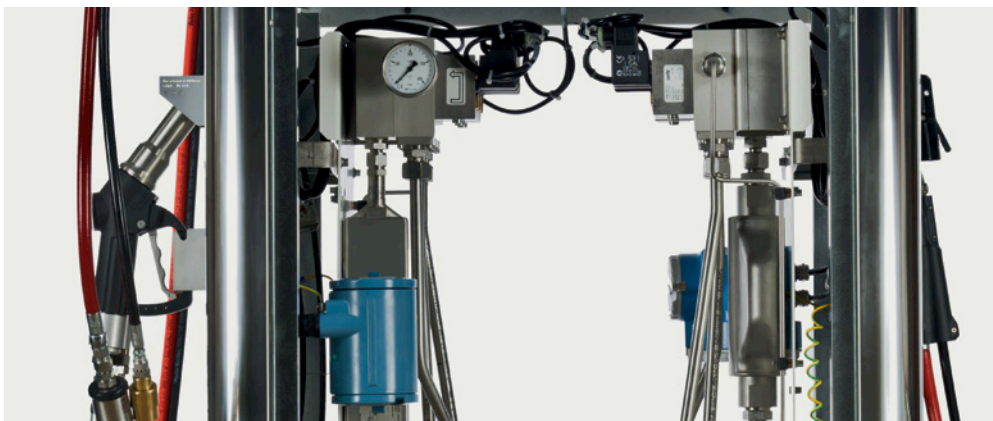

A safer environment

Full compliance with international and local metrology requirements (incl. NMI OIML R139), and further benefits from rigorous testing methodology.



Quantium 310 CNG

Technical Specifications*

Mechanical

- Modular hose system
- Ambient temperature range -20°C to +40°C
- Re-connectable breakaways
- OPW CNG Pistol Grip nozzle
- Emergency stop button

Pneumatics

- Coriolis mass-flow meter
- 200 to 260 bars inlet pressure
- Solenoid valves
- Standard refill duration ≤ 3 min (for a light vehicle)

Electronics

- Data configuration by console or by remote control
- LED Backlight LCD (amount, volume, pricing)
- Provide complete support for EPOS protocols (including IFSF)
- Battery-protected memory for security in the event of power failure
- Power supply: 3 phase + N, AC 50 Hz, 10 A, 400/230 V, +10% -15%

Options

- Pressure compensation system
- 1 to 3 inlet lines
- Additional slave screen
- Wide range of nozzles and hose types available
- Fire and tilt sensors
- Heater for colder environments
- Fleet management system (DiaLoG)
- Refilling push buttons
- Dead-man push button*
- Push to Start – Push to Stop buttons*

*According to country specifics.

Safety & Regulations

The Quantium 310 CNG dispenser is designed to fully comply with Safety, environmental and W&M standards.

This dispenser will be delivered with the following certification:

- EC Marking
- ATEX approvals
- NMi (OiML R139)
- LNE for France
- (Other Country specific weights and measures as applicable)

Tokheim Worldwide



Contact

Tokheim Headquarters

Unit 3 Baker Road
West Pitkero Industrial Estate
DD5 3RT Dundee
United Kingdom

Tel: +44 (0)1382 598 000
Fax: +44 (0)1382 598 001

Further information

For any further information and detailed contacts for each country, please visit our website at www.tokheim.com or email us at global.marketing@tokheimglobal.com.

*As Tokheim regularly improves its products in line with evolving market and regulatory requirements, it reserves the right to change any of the specifications of these products, and this document without prior notice.